




**DOLLY VARDEN**<sup>®</sup>  
RUSTIC WARMTH. RECLAIMED AESTHETIC.  
**KOKANE**<sup>™</sup>



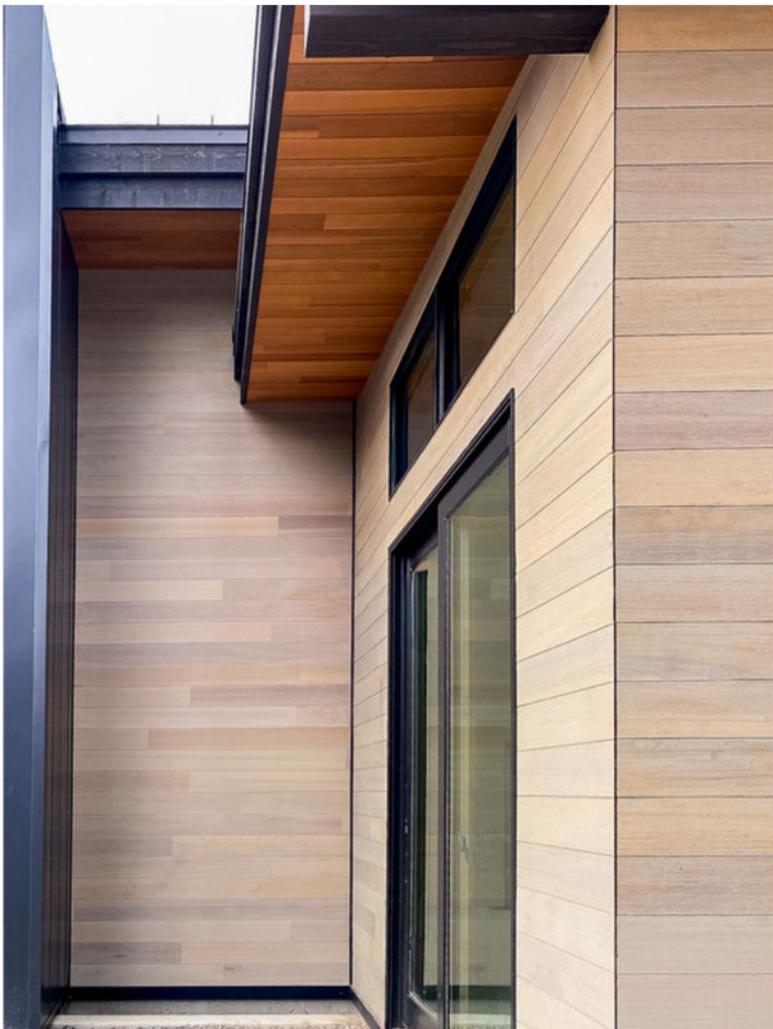

**DOLLY VARDEN®**  
 RUSTIC WARMTH. RECLAIMED AESTHETIC.  
**KOKANEE™**

# DOLLY VARDEN'S RUSTIC COUSIN

- Face:** Clear Vertical Grain Western Red Cedar
- Profiles:** Micro-V Joint (Eased Edge) or Fine Line (Nickel Gap)
- Widths:** 6" nominal (5-1/4" face) or 4" nominal (3-1/4" face)
- Thickness:** 1" nominal (11/16" actual)
- Length Range:** Specified Lengths 10', 12', 16'
- Conversion Factor:** 6" = 2.29 (LF Per SF)



MICRO-V (Eased Edge)



FINE LINE (Nickel Gap)

**Kokanee** is a premium tongue and groove Western Red Cedar paneling system, rooted in Shakertown's 70 years of cedar expertise. Designed to deliver refined rustic character with intentional visual rhythm, each panel is reinforced to provide enhanced strength, stability, and long-term performance compared to traditional solid cedar products.

**Composition and Materials:** Kokanee T&G panels are crafted from authentic Clear Vertical Grain Western Red Cedar and pressure-bonded with exterior-grade adhesives into a reinforced multi-layer construction. This full-surface bonding method meets U.S. PS 1-22 standards for exterior siding, delivering exceptional durability, dimensional stability, and insulation values up to R 1.65.

**Finishes:** Panels feature a natural Western Red Cedar face that highlights tonal variation and rustic character. Kokanee may be stained or sealed on-site, factory-primed, or factory prefinished. Custom finish options may be available by special order.


**Applications:** Ideal for exterior walls, soffits, and interior paneling where reclaimed-inspired warmth and long-term performance are desired. Kokanee is well suited for both modern rustic and contemporary architectural applications.

**Limitations:** Not designed as a substitute for shear panels, but may be used over them.

**Fasteners:** Use **stainless steel or hot-dipped galvanized fasteners** suitable for exterior applications. Nails should penetrate nailable wood substrate at least **1-1/4"**. A **6d splitless siding nail or 1/4 crown staple** is recommended for best performance.

**Fire Ratings:**

- Walls:** ASTM E2707 & WUI 12-7A-1 – installed over minimum OSB sheathing (#8160-2032-0003).
- Soffits:** ASTM E2957 & WUI 12-7A-3 – approved for direct installation to trusses or joists (#8160-2032-0004).
- 1-Hour:** Meets International Building Code Section 15-1.1, Table 721.1(2) for one-hour fire-rated assemblies.
- Flame Spread:** ASTM E84 Class "A".

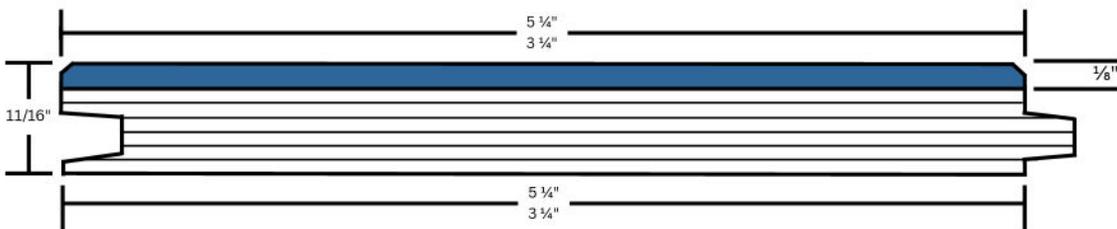

**Dolly Varden**  
 Western Red Cedar  
**SHAKERTOWN**  
 1200 KERRON STREET,  
 WINLOCK, WA 98596

Listing  
 STATE OF CALIFORNIA  
 FIRE MARSHAL  
 SERVICE

Exterior Wall Siding  
 8140-2032-0003

Under Eave / Soffit  
 8160-2032-0004

ASTM E2707  
 WUI Siding

ASTM E2957  
 WUI Soffit / Direct to Joist

ASTM E84  
 Class A Flamespread

