





TOUGH - TRUSTED - TIMELESS

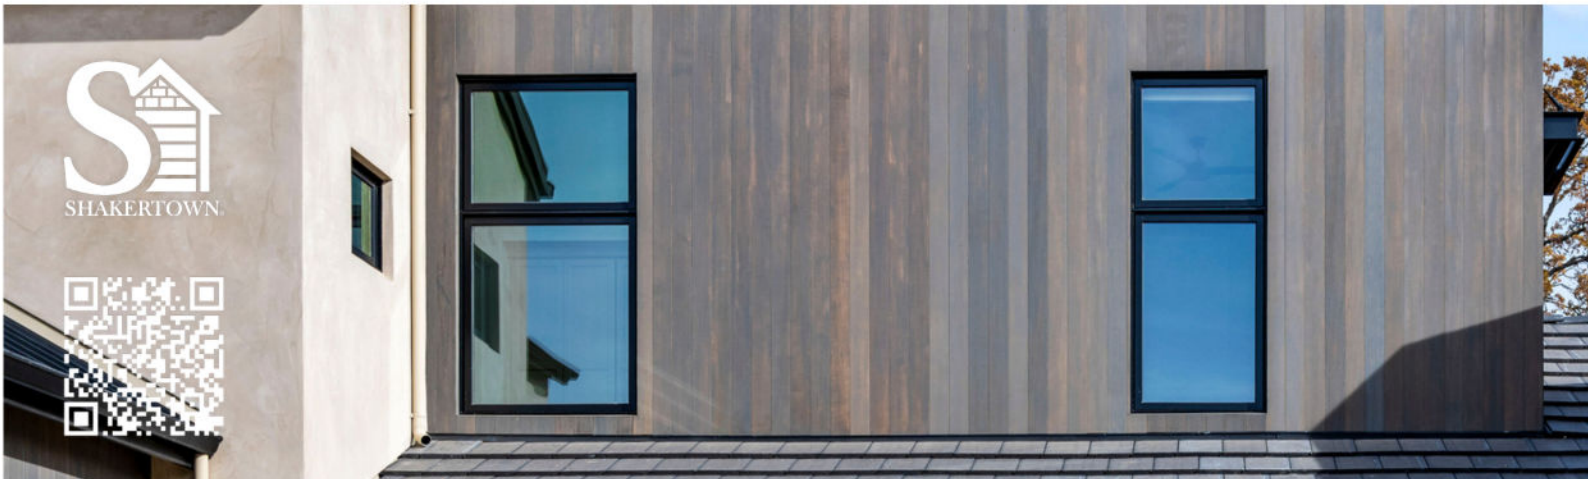

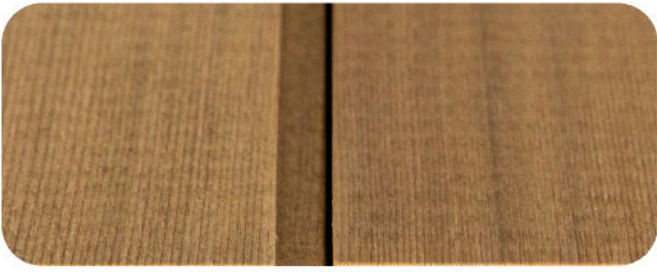

FINE LINE (Nickel Gap)



MICRO-V (Eased Edge)



Face: Clear Vertical Grain Western Red Cedar

Profiles: Micro-V Joint (Eased Edge) or Fine Line (Nickel Gap)

Widths: 6" nominal (5-1/4" face) or 4" nominal (3-1/4" face)

Thickness: 1" nominal (11/16" actual)

Length Range: Mixed lengths from 4'-16'

Conversion Factor: 6" = 1.14 | 4" = 1.23 (SF -> BF)

Dolly Varden is a premium tongue and groove Western Red Cedar paneling system, built on Shakertown's 70 years of cedar expertise. Each panel is **reinforced to provide greater strength, stability, and long-term performance** compared to solid or engineered cedar products.

Composition and Materials: Dolly Varden T&G panels are made from authentic Western Red Cedar pressure-bonded with exterior-grade adhesives into a 6-ply reinforced material. This full-surface bonding method meets all U.S. PS 1-22 standards for exterior siding, delivering superior durability and insulation values up to R 1.65.

Finishes: Panels feature a natural Western Red Cedar surface and can be stained or sealed on-site or factory pre-finished. Other wood species available by special order.

Applications: Ideal for exterior walls, soffits, and interior paneling where natural beauty and long-lasting performance are desired.

Limitations: Not designed as a substitute for shear panels, but may be used direct to stud when codes permit.

Fasteners: Use **stainless steel or hot-dipped galvanized fasteners** suitable for exterior applications.

Nails should penetrate nailable wood substrate at least **1-1/4"**.

A **6d splitless siding nail** or **3/4 crown staple** is recommended for best performance.


Fire Ratings:

Walls: ASTM E2707 & WUI 12-7A-1 – installed over minimum OSB sheathing (#8160-2032-0003).

Soffits: ASTM E2957 & WUI 12-7A-3 – approved for direct installation to trusses or joists (#8160-2032-0004).

1-Hour: Meets International Building Code Section 15-1.1, Table 721.1(2) for one-hour fire-rated assemblies.

Flame Spread: ASTM E84 Class "A".

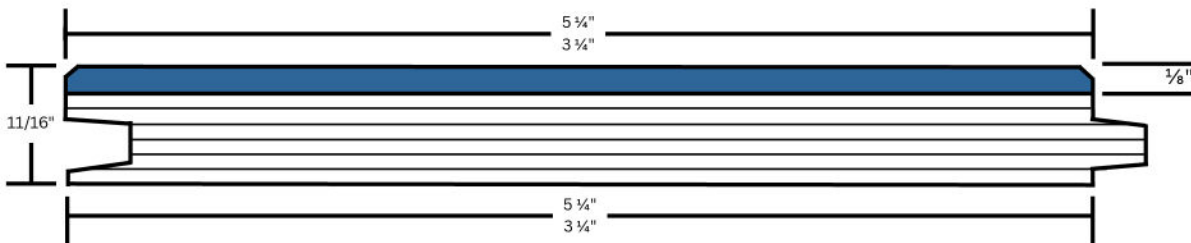

Some Alternative Surface Options Available



ALASKAN YELLOW CEDAR



HEMLOCK

Dolly Varden
Western Red Cedar
SHAKERTOWN
1200 KERRON STREET,
WINLOCK, WA 98596

Listing
STATE OF CALIFORNIA
STATE FIRE MARSHAL
SERVICE

Exterior Wall Siding
8140-2032-0003

Under Eave / Soffit
8160-2032-0004

ASTM E2707
WUI Siding

ASTM E2957
WUI Soffit / Direct to Joist

ASTM E84
Class A Flamespread

